

Synel Facial Recognition Terminal SY-Face



The most sophisticated recognition solution - AT A GLANCE!

Synel's facial recognition terminal, SY-Face, is an embedded face recognition system with leading "Dual Sensor" Face Recognition Algorithm, which is applicable for time attendance and access control applications.

The SY-Face is a time and attendance and access control terminal that uses face recognition technology to instantly identify users. The SY-Face provides a touch-free, hygienic alternative to fingerprint and hand readers, while still eliminating "buddy punching" and the need for cards or badges. Users simply look at the device and within seconds they are identified and either clocked in for work or granted secure access.

- Accurate
- Dependable - Successfully deployed in challenging real time environments
- Trackable - The only biometric method where the transaction records can be visually confirmed
- Contactless - Non-intrusive, a non-contact verification process
- User-friendly
- Reliable performance
- Multi factor authentication



Benefits

- Accurate and fast Identification
- Contactless authentication for the ultimate in hygienic conditions
- Voice prompt
- The system can work in different light conditions, even in the dark
- Incident trackable for security with photo captured by a camera

Technology Comparison

RFID recognition	<ul style="list-style-type: none">n Can be lostn Less secure - worry about fake access or buddy punchingn Extra cost to pay for badge or paper card
Fingerprint or hand recognition	<ul style="list-style-type: none">n Contact identification is unhygienicn Less applicablen Less accuraten Less securen Cannot capture picture for tracking after identification
Iris recognition	<ul style="list-style-type: none">n Less user-friendly - people feel nervous during enrollment or authenticationn Cost is much higher as iris recognition needs a special camera
Vein recognition	<ul style="list-style-type: none">n No contactless authenticationn Less applicable - need to look & touchn Cost is much higher as vein recognition needs a special camera
Facial recognition	<ul style="list-style-type: none">n Fast identificationn More accurate and securen User-friendlyn Contactless authentication - promotes hygiene

Applications

Time & attendance and access control applications for:

- Airports Customs
- Hospitals, clinics and health centers
- Large manufacturing companies
- High security sites
- Schools, high schools, universities
-


Technical Specifications



	SY-910 T&A market for small businesses	SY-920 T&A and access control market for medium to large businesses	SY-930 T&A and access control market for special industries of high level security
Processor	TI DM 644 CPU 594 MHz	TI DM 644 CPU 594 MHz	TI DM 644 CPU 594 MHz
User capacity	500	500 (1400- users optional)	500 (1400- users optional)
Record capacity	150,000 records	150,000 access control records	150,000 access control records
Recognition algorithm	Dual Sensor _{TM} V2.0	Dual Sensor _{TM} V2.0	Dual Sensor _{TM} V3.0
Sensor	Specialized double sensor	Specialized double sensor	Specialized double sensor
Verification method	Face, PIN & face	Face, PIN & face, card, card & photo, card & face	Face, PIN & face, card, card & face
Verification speed	Less than 1 second (1400 users)	Less than 1 second (1400 users)	Less than 1 second (1400 users)
keyboard	4*4 touch keypad	4*4 touch keypad	4*4 touch keypad
LCD	3.5" TFT color screen, 65,000 bright color, 320*240 resolution	3.5" TFT color screen, 65,000 bright color, 320*240 resolution	3.5" TFT color screen, 65,000 bright color, 320*240 resolution
Communication method	TCP/IP, USB host	TCP/IP, USB host	TCP/IP, USB host
Power	12V DC, working current 500 mA	12V DC, working current 500 mA	12V DC, working current 500 mA
Environment light	0-5000 Lux	0-5000 Lux	0-5000 Lux
Working distance	30-80 cm	30-80 cm	30-80 cm
Working temperature	0-40°C	0-40°C	0-40°C
Working humidity	20%-80%	20%-80%	20%-80%
Size	200* 95* 115* mm	200* 95* 115* mm	233* 74* 227* mm
Weight	505 gr	505 gr	905 gr
Installation method	Wall mounting	Wall mounting	Wall mounting
Security image capacity	-	4 GB SD card, 70,000 images	4 GB SD card, 70,000 images
Card recognition	-	EM of Mifare card (optional)	EM of Mifare card (optional)
Security alarm	-	Tamper alarm	Tamper alarm
Output for access control system	-	Standard Weigand 26/34 output, built-in relay	Standard Weigand 26/34 output, built-in relay
Certification	CE, FCC class and RoHS	CE, FCC class and RoHS	CE, FCC class A and RoHS


Access Control system

SY-920 / 930

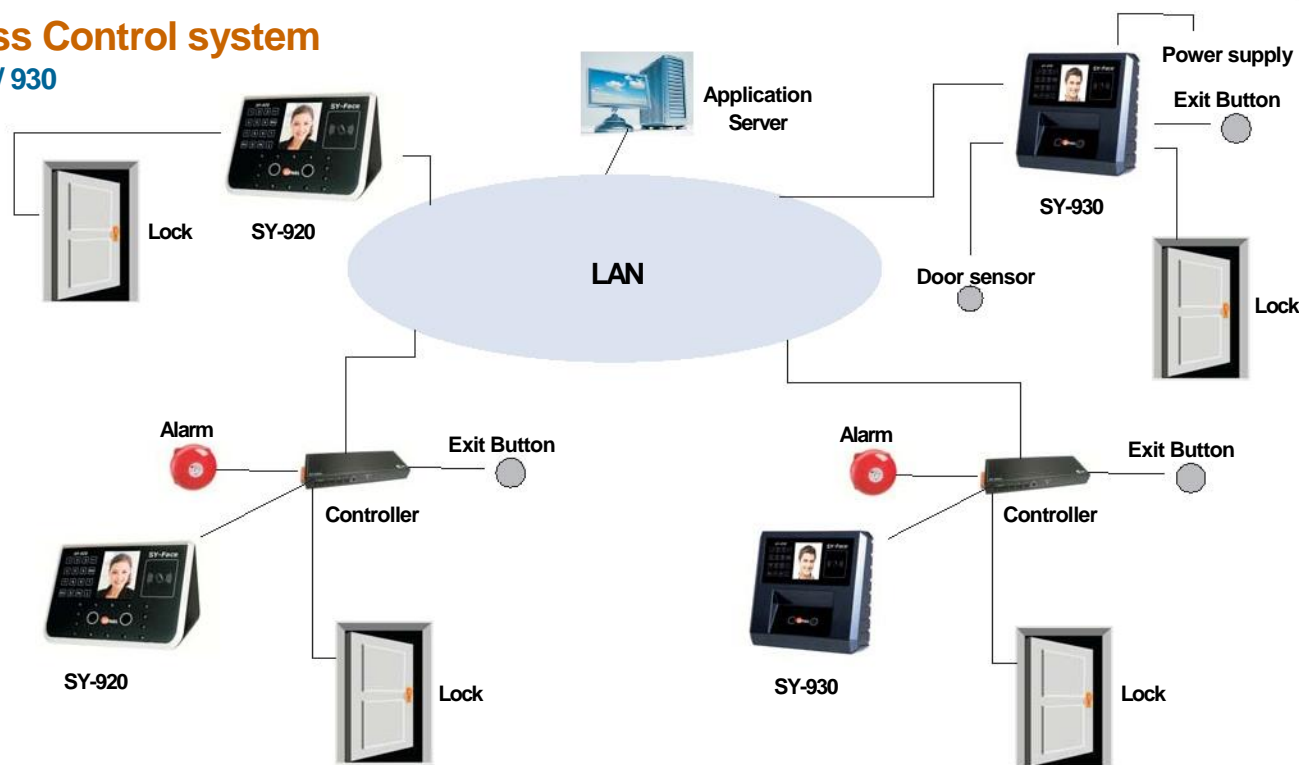

Stand alone or LAN system

SY-910 / 920

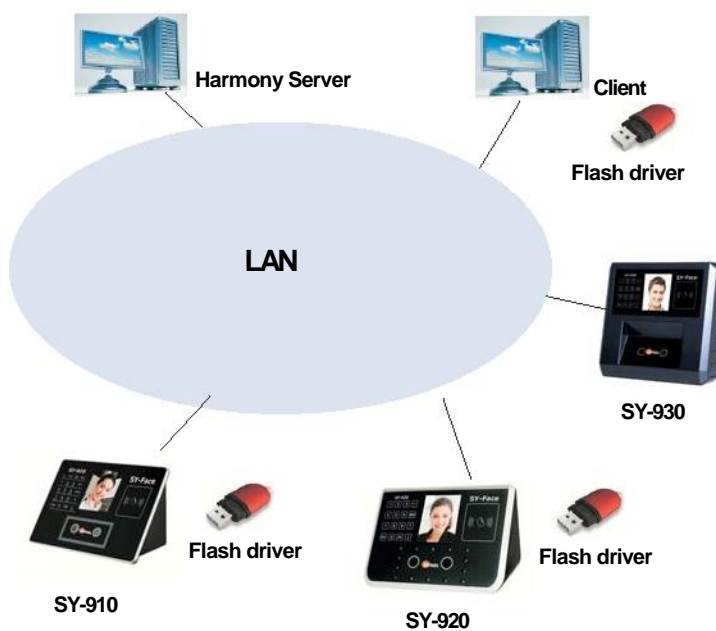

Synel Industries UK Ltd

Transputec House, 19 Heather Park Drive, HA0 1SS UK

Tel: +442089009991 Fax: +442089023595

e-mail: sales@syneluk.com Website: www.syneluk.co.uk

